


BESKRIVELSE

188

Kontraventil til vand, olie og trykluft. Til lodret og vandret montering.
Messing. Type "Glory".



D

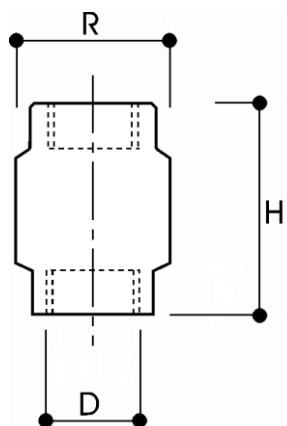

D	3/8"	1/2"*	3/4"*	1"*	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
H	52	58	65	75	80	86	94	93	104	119
R	29	32	39	48	60	67	84	104	121	156
Gr.	115	150	225	330	545	685	1025	1260	1810	3100


Dimensioner i **mm**. Alle gevind er i overensstemmelse med ISO 7 eller ISO 228 standarder.

*Tilgængelige størrelser i 188TEA

MATERIALER

Ventilhus	CW617N (UNI EN 12165) CuZn40Pb2 (TEA belægning på 188TEA)
Afskæring	POM
Forskruning	CW617N (UNI EN 12165) CuZn40Pb2
O-ring	NBR
Fjeder	Rustfrit stål AISI 302

TRYKTABSDIAGRAM

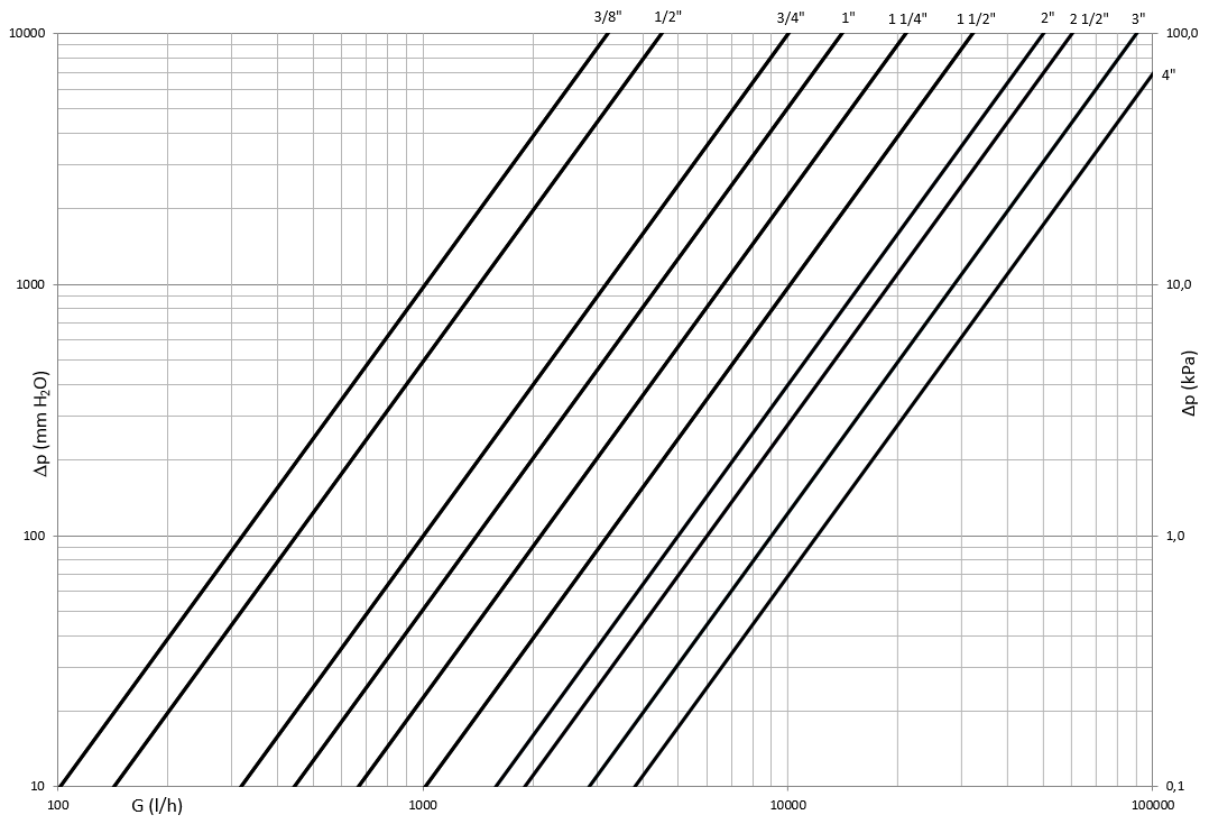

Dim.	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Kv	3.2	4.5	10	14	21	32	50	60	90	120
PN	25	25	25	25	18	18	18	8	8	8

ANBEFALET DRIFTSTEMPERATUR / MAKSIMALTRYK

25 bar - 110°C - non shock (3/8" - 1")

18 bar - 110°C - non shock (1 1/4" - 2")

8 bar - 110°C - non shock (2 1/2" - 4")

Minimumstemperatur -20°C med maks. 30% glykol. Ingen frost.